





**Ronak Electric Pars co.**

**Industrial plug sockets & connectors**

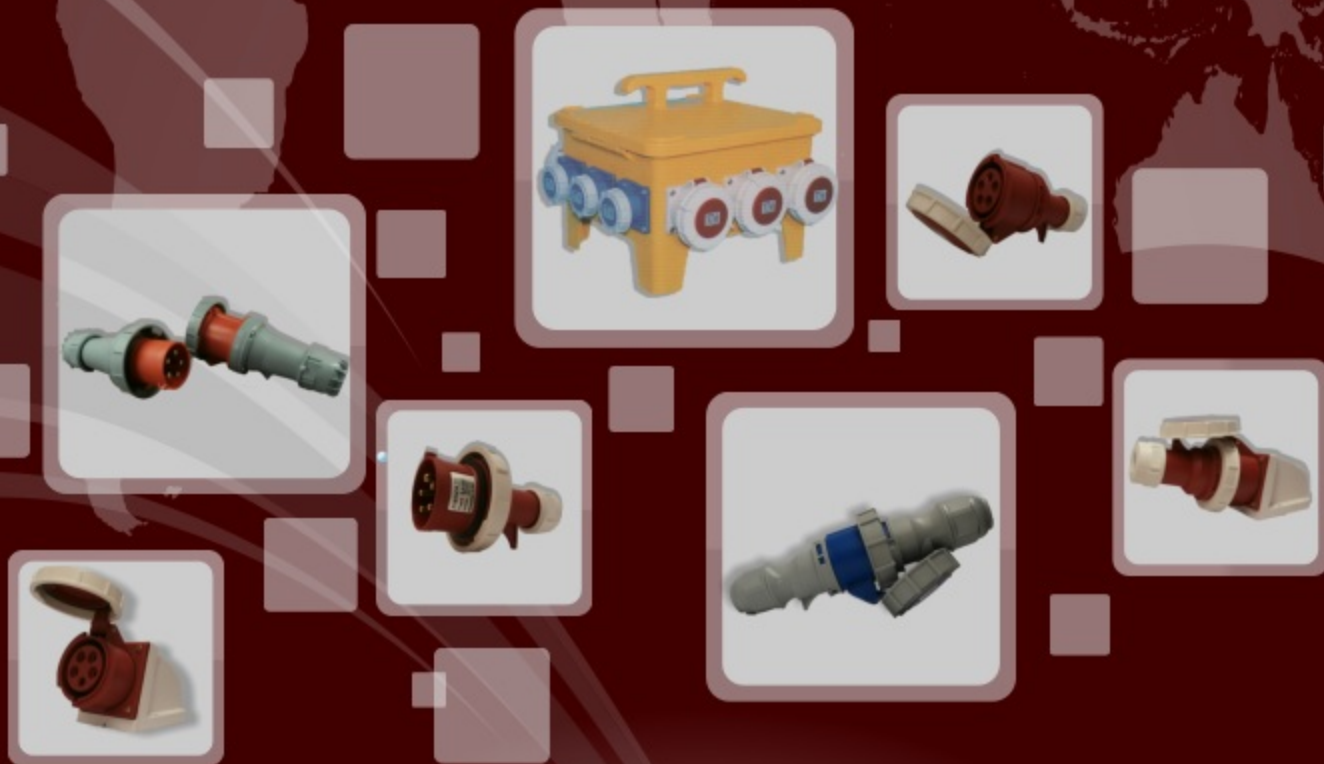

**FISHER**

# Model Signification

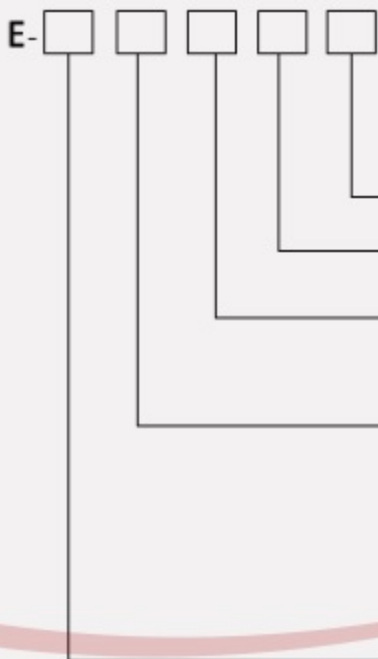

Earth contact place symbol ( Regular model "6h")	
	" 0 " Economy
	" 2 " IP67 type
	Pole 2,3,4,5
Rated Current	" 1 " = 16A
	" 2 " = 32A
	" 3 " = 63A
	" 4 " = 125A
Description	0 Plug
	1 Socket
	2 Coupler(connector)
	3 Panel mounting straight socket
	4 Panel mounting angled socket
	5 Utensil plug
	6 Panel mounting utensil socket

# FISHER

E-0152



Current:16 A  
voltage:380-440 V~  
IP67  
3P+N+E/6h  
Plug



Earth contact position Rated current(A)	6h	
	16	32
Pole	5	
	5	
Dimension(mm)	a	133 155
	b	87 99
	c	8-16 10-20
	sw	42 50
Cable nominal cross-section area(mm <sup>2</sup> )		1-2.5 2.5-6

E-2152



Current:16 A  
voltage:380-440 V~  
IP67  
3P+N+E/6h  
Coupler




Earth contact position Rated current(A)	6h	
	16	32
Pole	5	
	5	
Dimension(mm)	a	145 168
	b	93 104
	c	8-16 12-22
	sw	42 50
Cable nominal cross-section area(mm <sup>2</sup> )		1-2.5 2.5-6

E-1152



Current:16 A  
voltage:380-440 V~  
IP67  
3P+N+E/6h  
Socket




Earth contact position Rated current(A)	6h	
	16	32
Pole	5	
	5	
Dimension(mm)	a	155 172
	b	106 111
Cable nominal cross-section area(mm <sup>2</sup> )		1-2.5 2.5-6

E-5152



Current:16 A  
voltage:380-440 V~  
IP67  
3P+N+E/6h  
Utensil plug



Earth contact position Rated current(A)	6h	
	16	32
Pole	5	
	5	
Dimension(mm)	a	130 143
	b	77 83
	c	55.5 63
Cable nominal cross-section area(mm <sup>2</sup> )		1-2.5 2.5-6

E-0252



Current:32 A  
voltage:380-440 V~  
IP67  
3P+N+E/6h  
Plug




Earth contact position Rated current(A)	6h	
	16	32
Pole	5	
	5	
Dimension(mm)	a	133 155
	b	87 99
	c	8-16 10-20
	sw	42 50
Cable nominal cross-section area(mm <sup>2</sup> )		1-2.5 2.5-6

E-2252



Current:32 A  
voltage:380-440 V~  
IP67  
3P+N+E/6h  
Coupler




Earth contact position Rated current(A)	6h	
	16	32
Pole	5	
	5	
Dimension(mm)	a	145 168
	b	93 104
	c	8-16 12-22
	sw	42 50
Cable nominal cross-section area(mm <sup>2</sup> )		1-2.5 2.5-6

E-1252



Current:32 A  
voltage:380-440 V~  
IP67  
3P+N+E/6h  
Socket




Earth contact position Rated current(A)	6h	
	16	32
Pole	5	
Dimension(mm)	a	155
	b	106
Cable nominal cross-section area(mm <sup>2</sup> )	1-2.5	2.5-6

E-5252



Current:32 A  
voltage:380-440 V~  
IP67  
3P+N+E/6h  
Utensil plug



Earth contact position Rated current(A)	6h	
	16	32
Pole	5	
Dimension(mm)	a	130
	b	77
	c	55.5
Cable nominal cross-section area(mm <sup>2</sup> )	1-2.5	2.5-6

E-0352




Current:63 A  
voltage:380-440 V~  
IP67  
3P+N+E/6h  
Plug



Earth contact position Rated current(A)	6h	
	63	125
Pole	5	
Dimension(mm)	a	240
	b	115
	c	30
Cable nominal cross-section area(mm <sup>2</sup> )	6-16	16-50

E-2352



Current:63 A  
voltage:380-440 V~  
IP67  
3P+N+E/6h  
Coupler




Earth contact position Rated current(A)	6h	
	63	125
Pole	5	
Dimension(mm)	a	261
	b	114
	c	30
	d	112
Cable nominal cross-section area(mm <sup>2</sup> )	6-16	16-50

E-1352



Current:63 A  
voltage:380-440 V~  
IP67  
3P+N+E/6h  
Socket



Earth contact position Rated current(A)	6h	
	63	125
Pole	5	
Dimension(mm)	a	171
	b	170
	c	250
	d	118
	e	137
	f	104
Cable nominal cross-section area(mm <sup>2</sup> )	6-16	16-50



Current:200A  
voltage:500 V~  
IP67  
3P+N+E/6h  
Plug



Current:200A  
voltage:500 V~  
IP67  
3P+N+E/6h  
Panel mounting  
straight Socket



E-0132



Current:16 A  
voltage:220-250 V~  
IP67  
2P+E/6h  
Plug




Earth contact position	6h		
	16	32	
Rated current(A)	3		
Dimension(mm)	a	118	146
	b	80	93
	c	6-15	10-20
	sw	38	50
Cable nominal cross-section area(mm <sup>2</sup> )	1-2.5	2.5-6	

E-3132




Current:16 A  
voltage:220-250 V~  
IP67  
2P+E/6h  
Coupler




Earth contact position	6h		
	16	32	
Rated current(A)	3		
Dimension(mm)	a	130	163
	b	71	97
	c	6-15	10-20
	sw	38	50
Cable nominal cross-section area(mm <sup>2</sup> )	1-2.5	2.5-6	

E-1132



Current:16 A  
voltage:220-250V~  
IP67  
2P+E/6h  
Socket




Earth contact position	6h		
	16	32	
Rated current(A)	3		
Dimension(mm)	a	155	170
	b	99	108
Cable nominal cross-section area(mm <sup>2</sup> )	1-2.5	2.5-6	

E-2132



Current:16 A  
voltage:220-250 V~  
IP67  
2P+N+E/6h  
Socket




Earth contact position	6h		
	63	125	
Rated current(A)	3		
Dimension(mm)	a	100	120
	b	100	120
	c	80	100
	d	80	100
	e	39	45
	f	94.5	104
	g	114	127
	h	80	90
Cable nominal cross-section area(mm <sup>2</sup> )	6-16	16-50	

E-012



Current:16 A  
voltage:220-250 V~  
IP44  
2P+E/6h  
Plug




Earth contact position	6h	
	16	
Rated current(A)	3	
Dimension(mm)	a	97
	b	37
	φ	6
Cable nominal cross-section area(mm <sup>2</sup> )	1-2.5	

E-112



Current:16 A  
voltage:220-240 V~  
IP44  
2P+E/6h  
Panel mounting straight Socket




Earth contact position	6h	
	16	
Rated current(A)	3	
Dimension(mm)	a	50.8
	b	65
	c	42
	d	27
	e	38.2
	f	38.2
	g	4.5
Cable nominal cross-section area(mm <sup>2</sup> )	1-2.5	

E-212



Current:16 A  
voltage:220-240 V~  
IP44  
2P+E/6h  
Connector



Earth contact position	6h	
	16	
Rated current(A)	3	
Dimension(mm)	a	125
	b	73
	c	49
	φ	6
Cable nominal cross-section area(mm <sup>2</sup> )	1-2.5	



# Multi-functional combination socket



Dimension: 300\*230\*287  
 Input: E-5252\*1  
 Output: E-313\*3 / E-1132\*3  
 IP67



Dimension: 300\*230\*287  
 Input: E-5252\*1  
 Output: E-313\*3 / E-1132\*2  
 IP67

Dimension: 370\*340\*330  
 Input: E-5252\*2  
 Output: E-1152\*3 / E-1132\*3  
 IP67



Dimension: 300\*230\*287  
 Input: E-5252\*1  
 Output: E-1132\*6  
 IP67

## E-10132

Input: 1 plug 16A 220V  
 Output: 3 socket 16A 220V  
 IP67



## E-YD006

Dimension: 490\*140\*80  
 Socket: 112\*6 pcs  
 With plastic handel & window  
 Without MCCB  
 Without Cable & Plug

## COMLOCK

400 MZ  
 Connector 400A



## COMLOCK

200 GT  
 Connector 200A  
 400 GT  
 Connector 400A



# **Ronak Electric Pars co.**

**Industrial plug sockets & connectors**

office:

Address: unit1, No.11, Sixth Alley

North Kargar St., Tehran, Iran

P. C . : 1439644311

Phone: +98-21-88221749

Fax: +98-21-88007156